

FEATURES :

- 3PIN SIP Package
- Pin-out compatible with LM78XX Linear
- Efficiency up to 97%,Non isolated, no need for heatsink
- Customized Solutions Available
- UL94V-0 Package Material
- Operating Temperature From -40°C To +85°C
- 3 Years Warranty
- Short circuit protection, Thermal Shutdown

Specifications typical at TA=25°C, nominal input voltage
and rated output current unless otherwise specified

Part Number	Input Range	Output Voltage	Output Current	Efficiency	
	Vdc	Vdc	mA	Min.Vin(%)	Max.Vin(%)
01D-1R5-500	4.75-30	1.5	500	73	63
01D-1R8-500	4.75-34	1.8	500	82	71
01D-2R5-500	4.75-34	2.5	500	87	77
01D-3R3-500	4.75-34	3.3	500	91	81
01D-05-500	6.5-34	5.0	500	94	86
01D-6R5-500	8.0-34	6.5	500	95	88
01D-09-500	11-34	9.0	500	96	92
01D-12-500	15-34	12	500	97	94
01D-15-500	18-34	15	500	97	95

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance				±3	%
Short Circuit Protection	Hiccup, automatic recovery				
Line Regulation	1.5V to 6.5V			0.4	%
	9V to 15.5V			0.2	%
Load Regulation	1.5V to 6.5V (10% To 100% F.L)			0.6	%
	9V to 15.5V (10% To 100% F.L.)			0.4	%
Ripple & Noise (without Output Capacitor)	1.5V to 6.5V (BW=DC To 20MHz)			30	mVp-p
	9V to 15.5V (BW=DC To 20MHz)			40	mVp-p
Transient response setting time	25% load step change		350		us

YUAN DEAN SCIENTIFIC




DC-DC Converter

01D-500 SERIES


Non-Isolated

Single Output

0.45"*0.3"*0.4"



Temperature Derating Graph

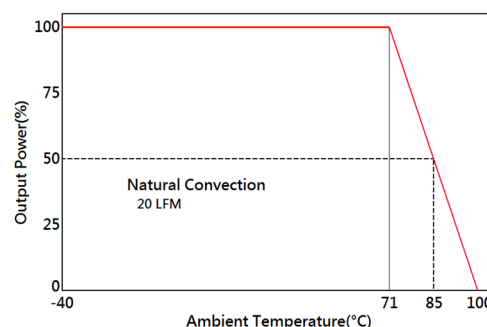

www.yds.com.tw



TEL : 886-6-3842899 FAX : 886-6-3843288


E-MAIL : ydsweb@yds.com.tw

Rev:0 2018/10/31

General Specifications


Parameters	Conditions	Min	Typ	Max	Units
Switching Frequency			330		KHz
Operating Temperature	With derating	-40		85	°C
Humidity	Non Condensing			95	%
Cooling	Natural Convection (20LFM)				
Case material	Non-Conductive Black Plastic				
Weight			2.0		g
Dimensions			11.6x7.6x10.4		mm
MTBF(+25°C)	using MIL-HDBK 217F		21098x10 ³		hours
MTBF(+71°C)	using MIL-HDBK 217F		4212x10 ³		hours

Dimensions

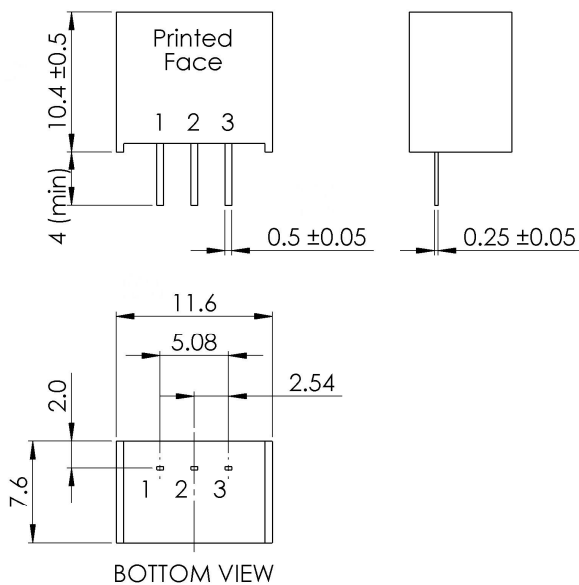

Unit : mm
Tolerance : XX.X ± 0.5 , XX.XX ± 0.25


Application Examples

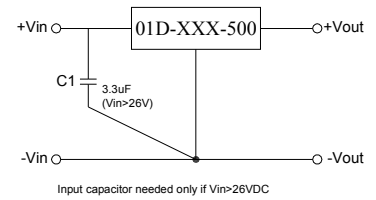


Add a blocking diode to Vout if current can flow backwards into the output, as this can damage the converter when it is powered down.
See Application Examples for details.

Application Examples

High efficiency, isolated, dual unregulated outputs

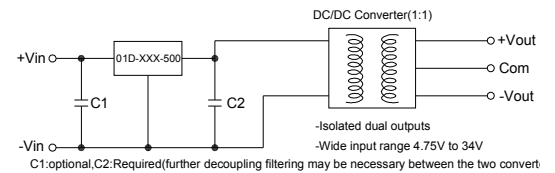

Isolated (up to 6KV), wide Input range regulated output

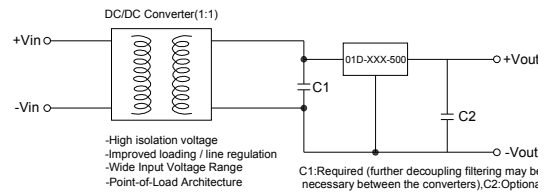

Part Number

01D - 05 - 500
A B C

A: Series
B: Output Voltage
C: Output Current

PIN Assignment

PIN	1	2	3
Function	+Vin	GND	+Vout