

FEATURES :

- 4:1Wide Input Voltage
- 5-6 Watt 24PIN DIL Package
- Efficiency To 80%
- 1500Vdc Isolation
- MTBF:>1,500,000 hrs
- Operating Temperature:-40°C TO +85°C

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Input Voltage	Output Voltage	Output Current	Input Current		Efficiency
				No Load	Full Load	
				Vdc	Vdc	
68DW5-24S03RNNL	9-36	3.3	1000	7.5	195	70
68DW5-24S05RNNL	9-36	5	1000	7.5	265	80
68DW5-24S12RNNL	9-36	12	470	7.5	285	80
68DW5-24S15RNNL	9-36	15	400	7.5	305	80
68DW5-24D05RNNL	9-36	±5	±500	12	265	80
68DW5-24D12RNNL	9-36	±12	±230	12	285	80
68DW5-24D15RNNL	9-36	±15	±190	12	295	80
68DW5-48S03RNNL	18-72	3.3	1000	5	98	70
68DW5-48S05RNNL	18-72	5	1000	5	133	75
68DW5-48S12RNNL	18-72	12	470	5	145	80
68DW5-48S15RNNL	18-72	15	400	5	154	80
68DW5-48D05RNNL	18-72	±5	±500	7.5	265	75
68DW5-48D12RNNL	18-72	±12	±230	7.5	142	80
68DW5-48D15RNNL	18-72	±15	±200	7.5	156	80

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Types				4:1	
Filter	Capacitor				

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance				±2	%
Short Circuit Protection	Continuous				
Line Regulation				±0.5	%
Load Regulation	Single (F.L To 10% Load)			±0.5	%
Load Regulation	Dual (F.L To 1/4 Load)			±1.0	%
Ripple & Noise	BW=DC To 20MHz			100	mVp-p
Transient response setting time	50% load step change		350		us

YUAN DEAN SCIENTIFIC



DC-DC Converter

68DW5 SERIES

5-6Watt 1.5KV Isolated


4 : 1 Input Voltage Range

Single & Dual Output

1.25" x 0.8"



Temperature Derating Graph

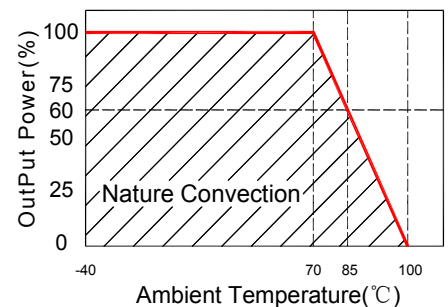

www.yds.com.tw



TEL : 886-6-3842899 FAX : 886-6-3843288

E-MAIL : ydsweb@yds.com.tw

Rev:2 2018/09/27

